


IF YOU...



MIX IT. FILL IT. PACK IT. SHIP IT.

WE HAVE A **PRODUCT** FOR YOU

Part #26BFL4

Drum Accessories

3/4" Molasses Gate Drum Faucet



The
CARY COMPANY
Est. 1895

MORPLUG Drum Wrenches

Fit virtually any bung on steel, fiber or plastic drum
 Three Wrenches have the same generous size and design, but are made of different metals

Each Morse drum wrench fits MANY different bung plugs



MADE IN USA



Model 59 MORplug Bung Wrench
 Designed with many surfaces and shapes to fit virtually all drum plugs. Works with steel or plastic drums. Solid ductile iron one piece construction for durability. Generous size provides extra leverage and hand clearance. Use for drums of non-flammable materials. Individually packed in sturdy shipping cartons showing instructions for use.



Model 59SRM MORplug Spark Resistant Bronze Wrench
 Made of manganese bronze to be spark-resistant, and with same shape as model 59. The use of a spark-resistant wrench is an extra precaution when using drums of flammable material. * High ultimate strength and extra elasticity of manganese bronze give an extra measure of durability.




Model 59SRZ MORplug Spark Resistant Zinc-Aluminum Alloy Wrench
 Same design as model 59, but made of zinc aluminum alloy to be spark resistant. * This alloy was selected for its high strength, toughness and economy.

Model #	Material	Ship Weight	Product Weight
59	Ductile Iron	4.5 Lb. (2 kg)	4.3 Lb. (2 kg)
59SRM	Spark Resistant Manganese Bronze	5.0 Lb. (2.3 kg)	4.4 Lb. (2 kg)
59SRZ	Spark Resistant Zinc Aluminum	4.0 Lb. (1.8 kg)	3.3 Lb. (1.5 kg)

* Other safety precautions may be necessary such as protective clothing, grounding and bonding of drums, ventilation and storage area preparation, etc. See Material safety data Sheet and O.S.H.A. requirements.

** The most common drums have 3/4" and 2" pipe thread (NPT) size bungs, which measure about 15/16" and 2-1/4" I.D. respectively.

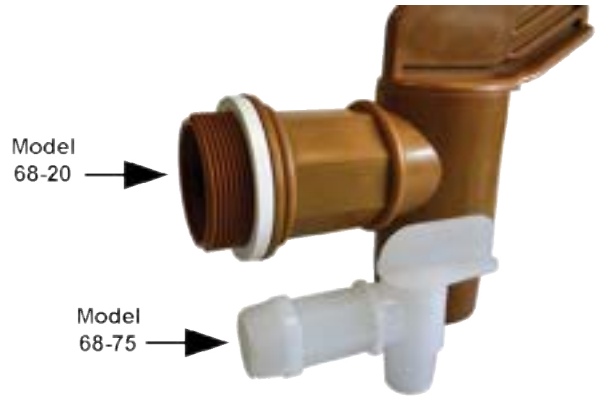

Model 68-20 and Model 68-75

All polyethylene construction. Ideal for use with non-flammable, often-corrosive liquids that are packed in drums and carboys made of or lined with polyethylene. Half turn on/off. Stays open until shut off. Use 68-20 for thick, viscous liquids or larger volume flow of thin liquids. Do not expose to temperatures above 120° F. *

Model #	Fits Approx. Bung Size	Dispensing I.D.	Ship Weight	Product Weight
68-75	3/4" (1.9 cm) **	9/16" (1.43 cm)	1/8 Lb. (.06 kg)	1.3 oz (.04 kg)
68-20	2" (5 cm) **	2" (5.08 cm)	5/8 Lb. (.28 kg)	8.7 oz (.25 kg)



Model 65-75 and Model 65-20

Designed especially for viscous, slow flowing liquids. Durably constructed with steel handle, cast gray iron body with lapped brass sliding plate. Stays open until shut off. Moving parts may be disassembled for cleaning. Can be padlocked. Not for flammables. *

- For a bung with National Pipe Thread (NPT)
- For use with room temperature liquids
- Will handle liquids up to a maximum of 130° F (54 C)

Model #	Fits Approx. Bung Size	Dispensing I.D.	Ship Weight	Product Weight
65-20	2" (5 cm) **	1.75" (4.45 cm)	4 Lb. (1.8 kg)	3.3 Lb. (1.5 kg)
65-75	3/4" (1.9 cm) **	0.625" (1.59 cm)	1.5 Lb. (.7 kg)	1.4 Lb. (.64 kg)
65-10	1" (2.54 cm) **	1" (2.54 cm)	2.3 Lb. (1.04 kg)	1.7 Lb. (.78 kg)

MORStak Drum Rackers will rack a drum in horizontal position with any of the following Morse Drum Faucets in place on the drum:

- Model 65-20 2" (5.1 cm) Molasses Gate
- Model 65-75 3/4" (1.9 cm) Molasses Gate
- Model 68-20 2" (5.1 cm) Poly Faucet
- Model 68-75 3/4" (1.9 cm) Poly Faucet

