

Part#: 26WDH0



26WDH0 - Vertical Side Deheader

- Vertical Manual Drum Deheader (8 lbs)
- Sharp-edged hardened steel replaceable blade
- Comfortable plastic hand grip
- For use on 55 gallon steel drums



Supplied By: **The Cary Company**

Ph: 630-629-6600

www.thecarycompany.com

272303

VERTICAL SIDE DEHEADER

FEATURES:

- OPEN ANY SIZE AND GAUGE STEEL DRUM QUICKLY, AND EASILY-ALLOWING DRUM RECYCLING WITHOUT THE RISK OF FIRE FROM CUTTING WITH A TOURCH.
- SHARP-EDGED HARDENED STEEL REPLACEMENT BLADE.
- COMFORTABLE HAND GRIP

WEIGHT: 8 LBS.

BOXED: YES X NO ---
 BOXED SIZE: 20" x 5-1/4 x 4-1/2"



Supplied By: **The Cary Company**
 Ph: 630-629-6600
www.thecarycompany.com

APPROVED	REVISIONS
ECN & DATE	REV.

PART NAME		DRAWN: RDS 02-20-06	
VERTICAL SLIDE DEHEADER		CHECKED:	
TOLERANCE UNLESS OTHERWISE SPECIFIED		APP. ENGR.	
FRACTION	3 PLACE DECIMAL	2 PLACE DECIMAL	SCALE: 1" = 1"
± 1/64	± .005	± .01	
ANGULAR ± 1-1/2°	SHEET 1 OF 1	A-272303	
BREAK ALL SHARP EDGES AND REMOVE ALL BURRS			



Supplied By: **The Cary Company**
 Ph: 630-629-6600
 www.thecarycompany.com

VERTICAL SLIDE DRUM DRUM DEHEADER (#26WDH0) Operating Instructions and Parts Manual

Specifications

The Vertical Slide Drum Deheader is designed specifically for removing lids from steel drums. The Drum Deheader allows for easy manual removal of steel drum lids. This product is distributed by:

The Cary Company
 1195 W Fullerton
 Addison, IL 60101
 Ph (630) 376-2400

Contact the factory if you have problems after reading these instructions, or for parts information and parts ordering.

Unpacking

When unpacking your Vertical Slide Drum Deheader, check carefully for shipping damage and missing parts. If damage has occurred or any parts are missing, file a claim with the delivering carrier within 24 hours and notify the dealer from whom the set was purchased.

Training

These instructions, as well as training on the proper use of a Vertical Slide Drum Deheader, shall be provided by the owner to all personnel using this Drum Deheader.

General Safety Information

Warning: These parts may not be factory installed, therefore, supplier cannot and will not be held responsible for incidents occurring due to incorrect use of the Vertical Slide Drum Deheader.

Warranty Repairs

If unit does not work properly, contact your dealer or the factory for units less than ninety days old.

Non-Warranty Service

If units are older than ninety days, repairs can be made easily on site with factory supplied parts.

NOTE: Do not send units to the factory for service without obtaining a "returned goods authorization number" from the customer service department. We will not be responsible for goods returned without proper authorization.

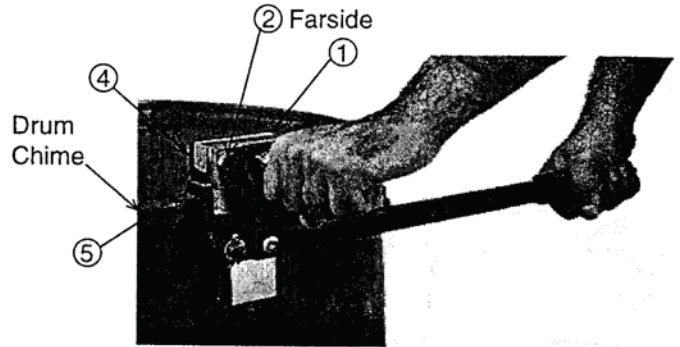


Figure 1
 Vertical Slide Drum Deheader
 26WDH0

Steps for Deheader Operation

- (1) Slip edge of CUTTING BLADE (Item 4) over CHIME GUIDE (Item 5).
- (2) Hook tool CHIME GUIDE (Item 5) on TOP of CHIME. **CAUTION: DO NOT PLACE CHIME GUIDE UNDER DRUM CHIME.**
- (3) Hook body of tool under drum chime flat against drum's side.
- (4) Take initial plunge cut, raise blade and move tool approximately 2-1/2" forward (clockwise) and continue cutting until drum head is completely off.

Steps for a Tighter Cut

- (1) Remove the 2 HEX NUTS (Item 2).
- (2) Remove CUTTING BLADE (Item 4).
- (3) Remove SPACER PLATE (Item 1) UNDER CUTTING BLADE (Item 4).
- (4) REPLACE in the following order:
 - (1) CUTTING BLADE (Item 4)
 - (2) SPACER PLATE (Item 1)
 - (3) HEX NUTS (Item 2)
- (5) Use deheader as described for normal operation above.

LIMITED WARRANTY



Supplied By: **The Cary Company**
Ph: 630-629-6600
www.thecarycompany.com

26WDH0

Description

The Vertical Slide Drum Deheader is designed specifically for removing lids from steel drums. The Wesco Drum Deheader allows for easy manual removal of steel drum lids.

NOTE: #272303 DEHEADER IS NOT NON-SPARKING.

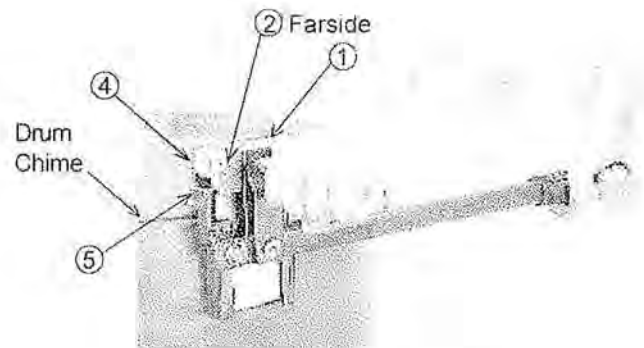


Figure 1

Vertical Slide Drum Deheader

Contact the factory if you have problems after reading these instructions, or for parts information and parts ordering.

Unpacking

When unpacking your Wesco Vertical Slide Drum Deheader, check carefully for shipping damage and missing parts. If damage has occurred or any parts are missing, file a claim with the delivering carrier within 24 hours and notify the dealer from whom the set was purchased.

Training

These instructions, as well as training on the proper use of a Wesco Vertical Slide Drum Deheader, shall be provided by the owner to all personnel using this Drum Deheader.

General Safety Information

Warning: These parts may not be factory installed, therefore, We cannot and will not be held responsible for incidents occurring due to incorrect use of the Vertical Slide Drum Deheader.

Warranty Repairs

If unit does not work properly, contact your dealer or the factory (215-699-7031) for units less than ninety days old.

Non-Warranty Service

If units are older than ninety days, repairs can be made easily on site with factory supplied parts.

NOTE: Do not send units to the factory for service without obtaining a "returned goods authorization number" from the customer service department. We will not be responsible for goods returned without proper authorization.

Steps for Deheader Operation

- (1) Slip edge of CUTTING BLADE (Item 4) over CHIME GUIDE (Item 5).
- (2) Hook tool CHIME GUIDE (Item 5) on TOP of CHIME. **CAUTION: DO NOT PLACE CHIME GUIDE UNDER DRUM CHIME.**
- (3) Hook body of tool under drum chime flat against drum's side.
- (4) Take initial plunge cut, raise blade and move tool approximately 2-1/2" forward (clockwise) and continue cutting until drum head is completely off.

Steps for a Tighter Cut

- (1) Remove the 2 HEX NUTS (Item 2).
- (2) Remove CUTTING BLADE (Item 4).
- (3) Remove SPACER PLATE (Item 1) UNDER CUTTING BLADE (Item 4).
- (4) REPLACE in the following order:
 - (1) CUTTING BLADE (Item 4)
 - (2) SPACER PLATE (Item 1)
 - (3) HEX NUTS (Item 2)
- (5) Use deheader as described for normal operation above.