

Part#: 26WRVV



FS-10-8V-300-PV-21-P RIEKE FLEXSPOUT® Closure w/ Buna Vent



Supplied By: **The Cary Company**
Ph: 630-629-6600
www.thecarycompany.com




Supplied By: **The Cary Company**
 Ph: 630-629-6600
 www.thecarycompany.com

FS-10-D PLASTIC TAMPERPROOF CAP
300 SERIES TEAROUT
600 SERIES RYOUT

FS-10-B5 CAP H.D. POLYETHYLENE

FS-10-A5 BODY L.D. POLYETHYLENE

FS-10-C-1 RETAINER ZINC
OR TIN PLATED COLD ROLLED
STEEL

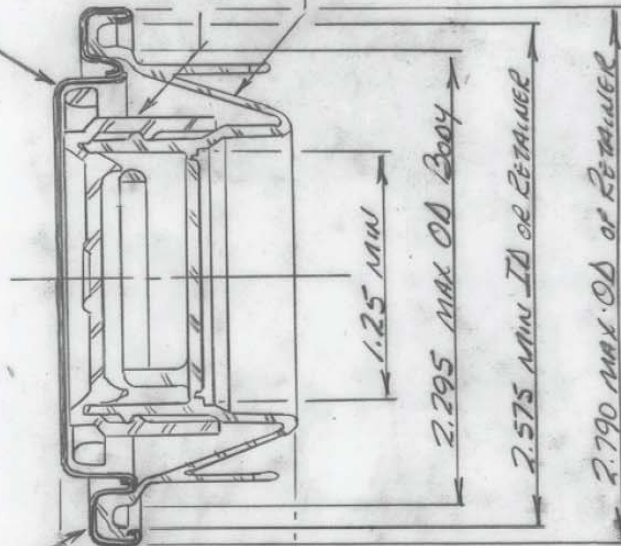

Note: Meets FDA REQUIREMENTS

This is NOT TO BE USED AS A SUB DRAWING

BREAK ALL SHARP EDGES WITH 1/64" R. UNLESS OTHERWISE SPECIFIED		DATE		DRAWN		CHECKED		APPROVED		CHANGE NO.		DATE		BY	
THE FOLLOWING TOLERANCES APPLY UNLESS OTHERWISE SPECIFIED		3-20-85		Cove		JMH		X		A		11-16-87		JMC	
ANGLES		SCALE		FULL											
HUNDRETHS															
THOUSANDTH															
DETAIL NAME				TOOL ASSY. NAME				PART NAME				TOOL ASSY. NO.			
<u>Self Venturi Fuel Spout Assembly</u>				<u>Self Venturi Fuel Spout Assembly</u>				<u>28000404</u>				<u>28000404</u>			
FOR				MATERIAL				TEMPER				DETAIL NO.			
												<u>FS-10-DV</u>			

28000404

BRUNING



Supplied By: **The Cary Company**

Ph: 630-629-6600

www.thecarycompany.com

PARAMETERS	SPECIFICATION	TEST METHOD
Material of construction	Type:- Polyethylene	COA
Standard Color (other colors available upon request)	Natural	QC Spec Visual
Nominal dimensions in inches (mm)		QC Spec Variable/Attribute Gauge
Opening Print Drawing Number	M0531-02 Rev: B	
Special markings		
Accessories	PV-21P Buna Vent	
Applied torque	There is no torque required for this closure because it is crimped on with manual crimping tool FS-600	QC Spec Torque Wrench
Method of delivery	500 /carton - ~ 35 lbs. gross/carton ~ 24 cartons/pallet	
Components	Black Cap / Plated Retainer / Body Self-Venting Fingers	Drawing No. 28000404 Rev: A

54.58-A