

IF YOU...



MIX IT. FILL IT. PACK IT. SHIP IT.

WE HAVE A **PRODUCT** FOR YOU

Part # 30W70W


Metal Caps for Glass Jars

70mm 70-400 White/Gold Metal Cap with
Pulp & Poly Liner




The
CARYCOMPANY
Est. 1895


1195 W. Fullerton Ave. | Addison, IL 60101 | T: 630.629.6600 | F: 630.629.3690 |

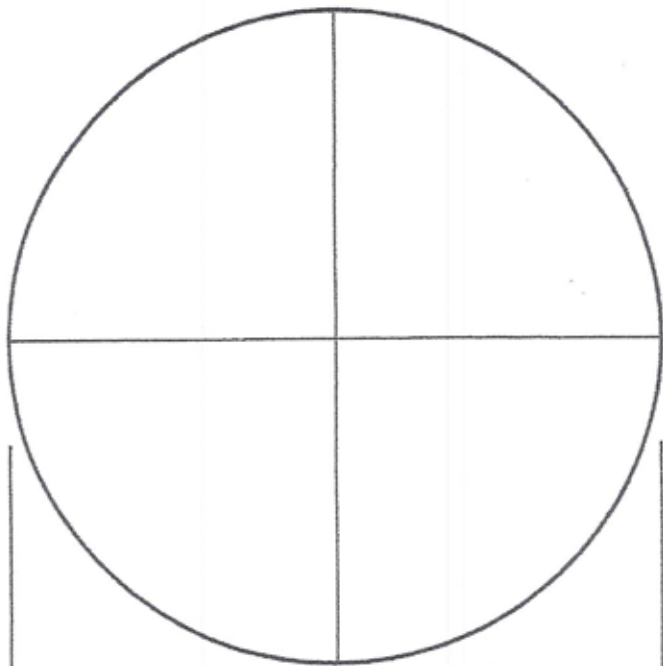

"T" = 2.781 MAX
 (KNURL O.D.)

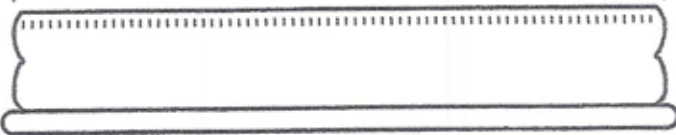


"E" = 2.686 MAX
 (CAP THREAD I.D.) PLUG GAUGE VERIFIED

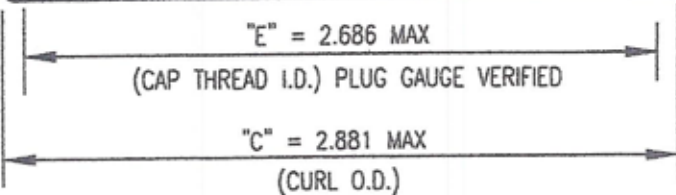

"C" = 2.881 MAX
 (CURL O.D.)

SIZE 70 MM CT SCREW CAP

METAL CLOSURE
 CONTINUOUS THREAD DIMENSIONS

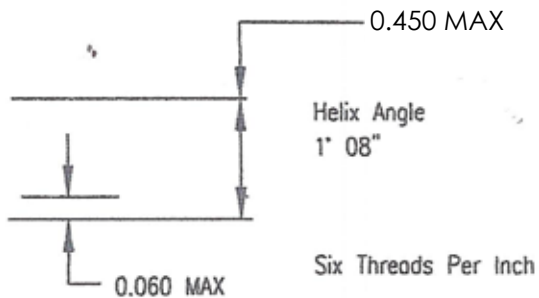

0.450 MAX

Helix Angle
 1° 08'

Six Threads Per Inch

0.060 MAX

The Max & Min. inside diameter of the thread are determined by round Max & Min plug gauges. The closure should permit entry of the min guage and no entry with a slight drag on the max gauge.

DWG. No. 600505		DATE: 1951
CMA Rev. CTC-101-09 10/10/06		DWG. BY LJT
Note: USER RESPONSIBLE FOR PERFORMANCE OF CONTAINER		PRECISION CALIPER VERIFIED BY: JDV 12-10-98

Specifications show dimensions to which screw caps are normally made. Variability in material may affect final dimensions of a particular lot.

Closure dimensions shown are those which have been found to be functional. Based on industry experience. Because of variability in closure materials and container dimensions, each closure/system should be individually evaluated to ensure it meets applicable performance criteria. Closures having dimensions outside these ranges are also appropriate for use if applicable performance criteria are met. Actual Container dimensions are controlling requirement and must be evaluated to ensure proper fit.