

KE Harsh Environment Constant-Wattage Heating Cable

Product Highlights

- ✓ Temperatures up to 500°F (260°C)
- ✓ Power remains constant regardless of temperature
- ✓ Can be cut-to-length at job site
- ✓ Ideal for a wide range of applications in corrosive environments:
 - Freeze protection
 - Viscosity control
 - High temperature process control
 - Asphalt plants
 - Oil refineries
 - Mines
 - Chemical and petrochemical processing areas
 - Other explosive and corrosive atmospheres
 - Severe arctic cold

Specifications:

- Maximum exposure temperature is 500°F (260°C)
- Moisture, chemical, flame, and radiation resistant
- 12AWG bus wires
- Dimensions 0.2" x 0.3" (5mm x 8 mm)
- 41lb. (19kg.) per 500-foot (152m)

Approvals:

FM Ordinary Locations
APPROVED Hazardous Locations:
 Class I, Division 2, Groups B, C, & D
 Class II, Division 2, Groups F, & G
 Class III, Division 2



Approvals valid only when used with appropriate heating cable and installation accessories, and installed in accordance with all applicable instructions, codes, and regulations.


Ordering Information:

Part Number Matrix

KECAB 4 120

Watts / ft: _____
 4, 8, 12

Voltage: _____
 120, 208, 240, 277, 480

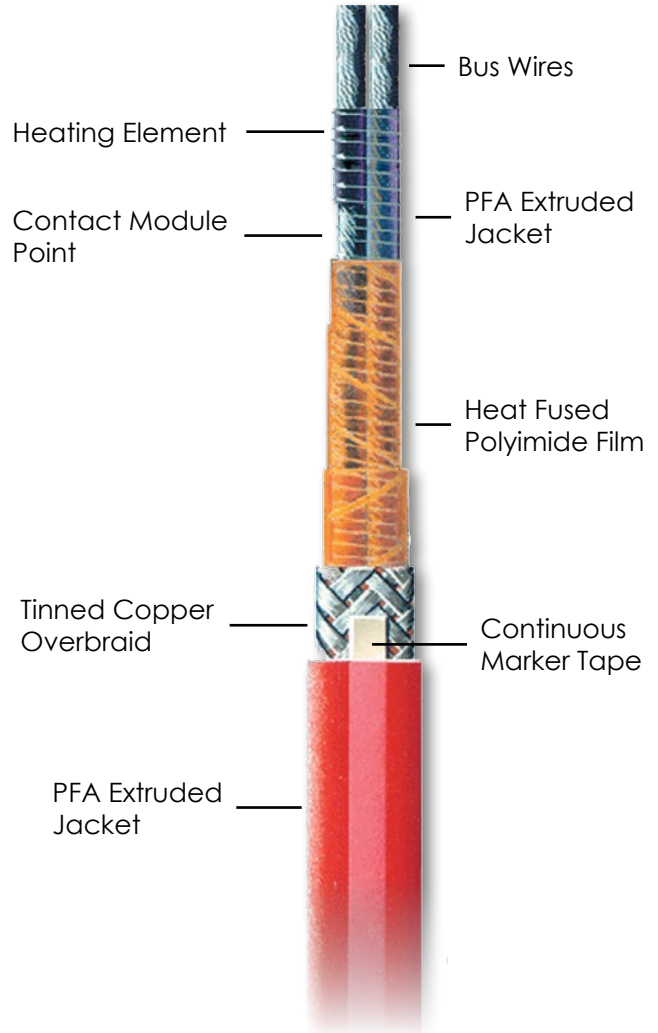

Maximum Circuit Length in ft (m)

Cable Type	120VAC	208VAC	240VAC	277VAC	480VAC
4 watts/ ft (13 watts/ m)	480 (146)	830 (253)	960 (293)	1110 (338)	1920 (585)
8 watts/ ft (26 watts/ m)	240 (73)	415 (127)	480 (146)	555 (169)	960 (293)
12 watts/ ft (39 watts/ m)	160 (49)	277 (85)	320 (98)	370 (113)	640 (195)

Circuit Module Length in ft (m)

Cable Type	120VAC	208VAC	240VAC	277VAC	480VAC
4 watts/ ft (13 watts/ m)	4.0 (1.2)	4.0 (1.2)	4.0 (1.2)	4.0 (1.2)	8.0 (2.4)
8 watts/ ft (26 watts/ m)	4.0 (1.2)	4.0 (1.2)	4.0 (1.2)	4.0 (1.2)	6.0 (1.8)
12 watts/ ft (39 watts/ m)	2.0 (0.6)	6.0 (1.8)	4.0 (1.2)	4.0 (1.2)	6.0 (1.8)

When ordering, please allow a minimum of 1 module length extra for terminations.



P: 630-629-6600 | F: 630-629-3690
 1195 W. Fullerton Ave. Addison, IL 60101
 www.thecarycompany.com