


BIH-G/RH

XtremeFLEX® BIH-G Grounded Heavy Insulated Heating Tapes

Product Highlights

- ✓ Grounded for your safety
- ✓ Exceptional flexibility
- ✓ Rapid thermal response
- ✓ Exceptional durability
- ✓ Suitable for electrically conductive surfaces
- ✓ Includes high-temperature tie-downs for easy installation.

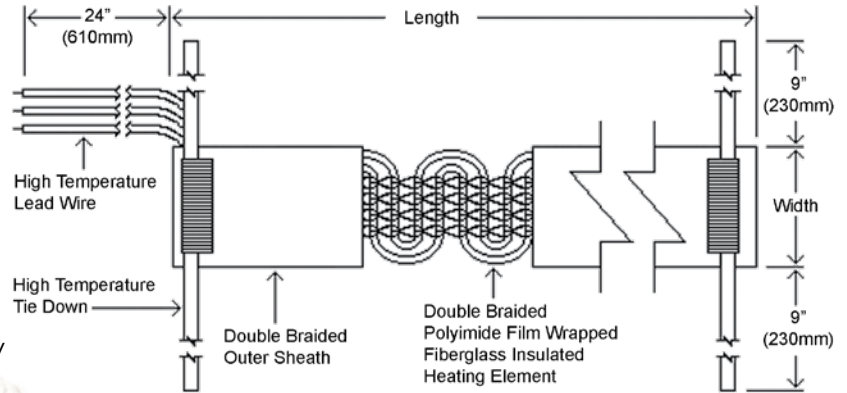

With Ground

Specifications:

- Maximum exposure temperature: 482°F (250°C)
- Patented grounded heating element
- Polyimide film wrapped fiberglass knitted and braided construction
- Fiberglass outer sheath
- Power density: 9.6 W/in² (0.015 W/mm²)
- 120 or 240VAC
- 24" (610mm) lead wire
- Ingress Protection Rating: IP5X

Ordering Information:

Width in (mm)	Length ft (m)	Total Watts	Part No. 120VAC	Part No. 240VAC
1.0 (25)	2 (0.6)	230	BIH101020LG	BIH102020LG
1.0 (25)	4 (1.2)	460	BIH101040LG	BIH102040LG
1.0 (25)	6 (1.8)	690	BIH101060LG	BIH102060LG
1.0 (25)	8 (2.4)	920	BIH101080LG	BIH102080LG
1.0 (25)	10 (3.1)	1150	BIH101100LG	BIH102100LG

HEATING TAPE

Distributed by:

The **CARY COMPANY**
Est. 1895