

IF YOU...



MIX IT. FILL IT. PACK IT. SHIP IT.

WE HAVE A PRODUCT FOR YOU



82mm 82-2040 Gold Button Metal Lug Cap w/ Plastisol Liner

Product Category: Metal Lug Caps


Part #	30WL12
Neck Width	82 mm
Neck Finish	82-2040
Liner Compatability	Glass
Sealing Characteristics	Tamper Indicating
Color	Gold
Material	Tinplate
Case Pack	750 ea.
Pallet Pack	30,000 ea (40 Cases)
Case Weight	24 lbs.
Cas	Yes
BPA Free	Yes
Country of Manufacture	United States
Industries	Food & Beverage

Cap size: 82mm Twist Cap (KA-82-S4 / S-1461)


Description: Twist cap with a low-vac flip panel, made for sealing glass jars containing food or juice

DIMENSIONS

Glass Finish: GPI 2040	
D (Outside Dia.)	3.345/3.360"
E (Plug Dia.)	3.073/3.088"
H (Overall Height)	.410/.430"
C (Compound Thickness)	.022/.047"
S (Dist. To top of Lug)	.360/.380"
Pull Down Max	6 in. Hg

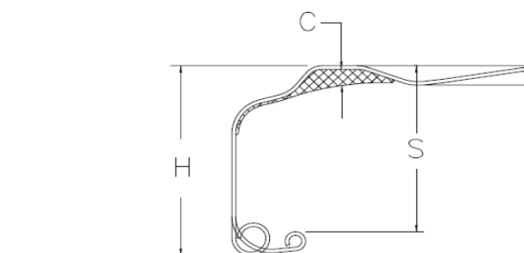

VIEW A-A

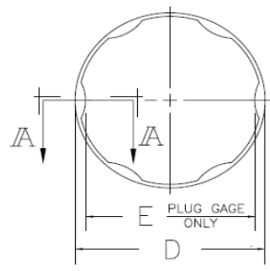

Materials

Electrolytic tin plate or Tin free steel
• Minimum Nominal Thickness: .0066"

Interior Coating
• Food grade interior coating system specified according to product requirement. (FDA compliant)

Exterior Coating
• White, clear or gold base coat with over varnish as required
• Printing decoration according to customer specification.

Compound
• Food grade plastisol according to thermal process (pasteurization, hot fill and cool, dry seal, retort) and product type (oily and non-oily). (FDA compliant)

USE CONDITIONS

Operating Guidelines and SOP's form an integral part of the closure specification. No responsibility can be taken if these instructions are not followed.

Note: For aggressive and high acid content products please contact us.

	Yes	No	NOTES:
Pasteurization***	x		1)
Hot Fill***	x		2)
Retort***		x	3)

PACKAGING

Carton		Pallet	
Size (in)	20 x 11.5 x 16	Size (in)	40 x 48
Caps Qty.	750	Cartons per pallet	40
Gross Weight	24.0 lbs.	Caps per pallet	30000

Note: Quantity of closures in cartons may vary dependent upon manufacturing plant. For confirmation, contact us. Alternative packing available.

Stacking: Cap cartons should not be stacked more than 2 pallets high

Storage conditions: Temperature range from 40 - 86°F (5 - 30°C) - relative humidity below 70%.
Closures should be used within 2 years of the manufacturing date on the carton (Deviation granted under CROWN's approval).

DECLARATION OF CONFORMITY AND CONFIDENTIALITY

We declare that all the caps supplied are manufactured for the purpose of sealing food containers. All materials used to manufacture said caps are authorized under the relevant laws of the country in which they are supplied as well as the FDA. We are not responsible for use conditions deviating from the limitations given in this Technical Data Sheet unless agreed beforehand in writing.